


Tamlex Data Sheet

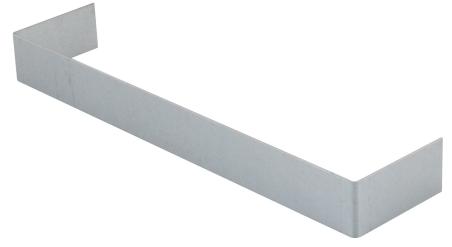

| Product Code: | Product Range: | Issue Date: |
|---------------------------------------------------------------------------------------------------|-----------------------|-------------|
| FSE/91 | Flush Screed Trunking | 18/2/2026 |
| Description: | | |
| Stop End for 225x25mm Flush Screed Trunking | | |
| Features: | | |
| <ul style="list-style-type: none">• Suitable for Tamlex flush screed trunking only. | | |
|  | | |
| Technical: | | |
| Product Type Flush Screed Floor Trunking | | |
| Width 225mm | | |
| Weight 0.08 Kgs | | |
| Material Pre-Galvanised Steel (Zinc Coated) | | |
| Colour/Finish Self Colour | | |
| Standards BS EN 10346:2015 | | |

Extra Information

The galvanised trunking lids and service boxes should be in position before the screed is poured to ensure the pressure of the screed does not distort the side walls of the trunking.

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.

Important:

Screed trunking must be installed on a solid foundation and completely supported across its complete width by a screed ribbon.