

**Product Code:**

FS225/25/3

Product Range:

Flush Screed Trunking

Issue Date:

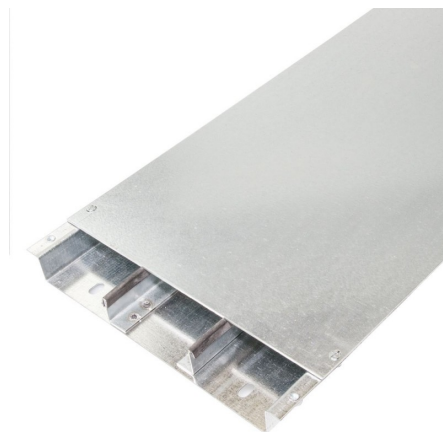
7/11/2025

Description:

3 Compartment 225x25mm Flush Screed Trunking (2M Length)

Features:

- 3 Segregated Compartments.
- Shallow 25mm deep trunking profile.
- Reinforced lid to allow foot traffic.
- Manufactured from zinc galvanised steel strip to BS EN 10346:2015.
- Fillets have rubber gasket strip fitted to increase stability and reduce lid deflection.
- Intersections are 55mm deep to allow the maximum cable capacity throughout the system.
- **Screed trunking must be installed on a solid foundation and completely supported by a screed ribbon.**

**Technical:****Product Type** Flush Screed Floor Trunking**Width** 225mm**Length** 2000mm**Weight** 12.60 Kgs**Dimensions** 70mm x 82mm x 70mm**Number of Compartments****Material** Pre-Galvanised Steel (Zinc Coated)**Colour/Finish** Self Colour**Standards** BS EN 10346:2015**Supplied With** If required, M6 x 40mm jacking bolts can be ordered separately under Catalogue Number (TF005).**Pack Quantity** 2m length complete with 2x 1m lids and couplers.**Important:**

Screed trunking must be installed on a solid foundation and completely supported across its complete width by a screed ribbon.

Extra Information

The galvanised trunking lids and service boxes should be in position before the screed is poured to ensure the pressure of the screed does not distort the side walls of the trunking.

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.

Tamlex | Harcourt | Halesfield 15 | Telford | Shropshire | TF7 4ER

T: 01952 586689 **E:** sales@tamlex.co.uk **W:** www.tamlex.co.uk