

**Product Code:**

HDL/BC/G

**Product Range:**Heavy Duty Accessories, Hot  
Dipped Galvanised, Ladder**Issue Date:**

2/9/2025

**Description:**

Heavy Duty Ladder Bendable Connector (Pairs) HDG

**Features:**

- Bendable connectors can be used for:
  - A) fabricating fittings onsite from cut lengths of ladder.
  - B) reducing width of a run to the next size down when a properly manufactured reducer is not available.
  - C) correcting minor mis-alignment problems.
  - D) coupling lengths of ladder to form articulated bends.
- Bendable couplers can be joined together for multiple configurations.
- Supplied in pairs with the appropriate quantity of fasteners. (4 per coupler)
- Manufactured from the same HDG steel as straight lengths for consistent strength and corrosion protection.


**Technical:****Product Type** Connector**Height** 115mm**Length** 250mm**Weight** 0.70 Kgs**Gauge** 1.5mm**Material** Post Hot-Dipped Galvanised (HDG)**Colour/Finish** Self Colour**Standards** BS EN ISO 1461:2009**Supplied With** 8x M10 Fastener Sets Per Coupler**Pack Quantity** Pairs**Important:**

HDG ladders are suitable for internal and external use, including light industrial and coastal environments. Ensure cut edges or drilled holes are treated with a suitable zinc-rich paint or similar to maintain corrosion protection.

**Extra Information**

adjust each coupler position to align the slots with the side rail slots and secure with all fasteners. Recommended Torque (M10): 40Nm., Slide the couplers under the return flanges of one ladder side rail and loosely fit a single fastener to each coupler to hold it in place. Slide the second ladder over both couplers

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.

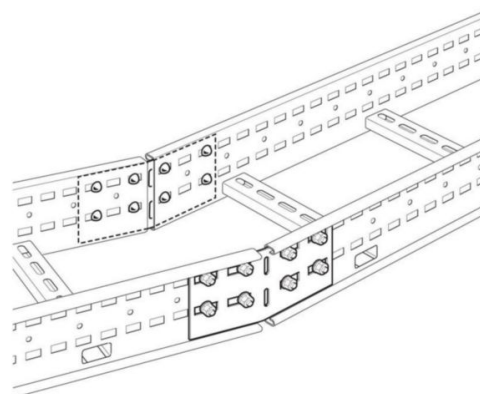

Tamlex | Harcourt | Halesfield 15 | Telford | Shropshire | TF7 4ER

**T:** 01952 586689 **E:** sales@tamlex.co.uk **W:** www.tamlex.co.uk