


Tamlex Data Sheet



Product Code:	Product Range:	Issue Date:
MDL/150/G	Medium Duty Lengths, Ladder Rack, Medium Duty	18/2/2026

Description:

150mm Medium Duty 100mm Deep Ladder HDG - 3 Metre Length

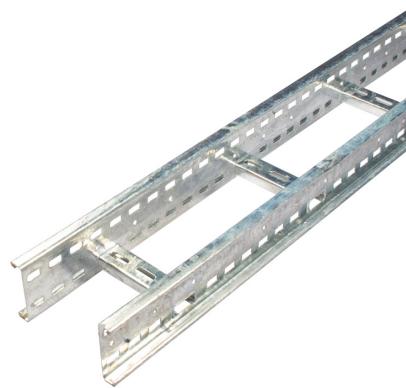

Features:

- Durable hot dip galvanised finish for long-term corrosion resistance.
- Designed to support high cable loads over long spans.
- Suitable for heavy-duty industrial and commercial applications.
- Wide range of accessories including bends, tees, risers and reducers.
- Compatible with industry-standard fixings and couplers.
- Rung spacing: 300mm between centres.
- Even when ladders are cut to length, the slots in the coupler will always align with the slots in the ladder side rails.
- When connecting fittings to straight lengths, use fastener sets.
- Manufactured to meet UK and international standards.
- Covers for cable ladder available upon request.
- 6 metre lengths available upon request.

Technical:

Product Type Ladder Tray

Width 150mm

Height 100mm

Length 3000mm

Weight 12.10 Kgs

Dimensions 300mm Rung Pitch

Gauge 1.5mm

Material Post Hot-Dipped Galvanised (HDG)

Colour/Finish Self Colour

Standards BS EN ISO 1461:2009

Important:

HDG ladders are suitable for internal and external use, including light industrial and coastal environments. Ensure cut edges or drilled holes are treated with a suitable zinc-rich paint or similar to maintain corrosion protection.

Extra Information

3 m and 4 m spans using 3 m lengths. Safe working load should include all cable loads and any other additional loads (e.g. wind, snow).

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.


Dimensions: (mm)

W 190mm



Tamlex Data Sheet

MEDIUM DUTY DIMENSIONS AND WEIGHTS

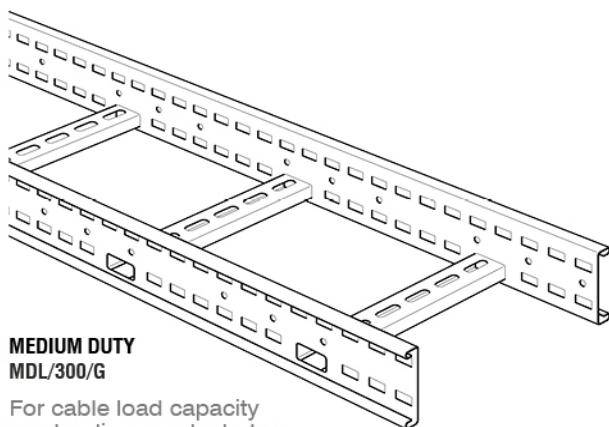

MEDIUM DUTY
MDL/300/G


For cable load capacity
see loading graphs below

GAUGE
Standard side rail = 1.5mm

WEIGHTS


WIDTH (W)	CAT NO.	WEIGHT (kg)
150	MDL/150/G	12-1
300	MDL/300/G	13-4
450	MDL/450/G	14-6
600	MDL/600/G	16-9
750	MDL/750/G	20-3
900	MDL/900/G	22-2

All weights given are for a 3m straight length in hot dip galvanised finish.

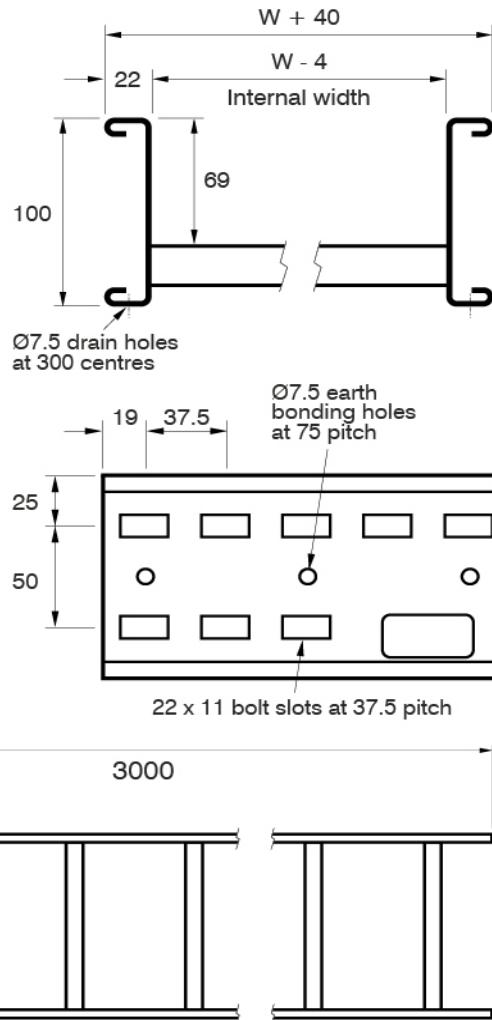

LOADING GRAPHS

- Load tests carried out to BS EN 61537 test type 1 (safety factor 1.7+ and joint in middle of span) or test type 4 (safety factor 1.7+ and joint in middle of span with rung slot over support).
- Load tests carried out over 2 m, 3 m and 4 m spans using 3 m lengths.
- Safe working load (kg/m) should include all cable loads and any other additional loads (e.g. wind, snow).
- When installed, inner span deflection will vary depending on joint positions but will typically be about half of test end span deflection shown below.

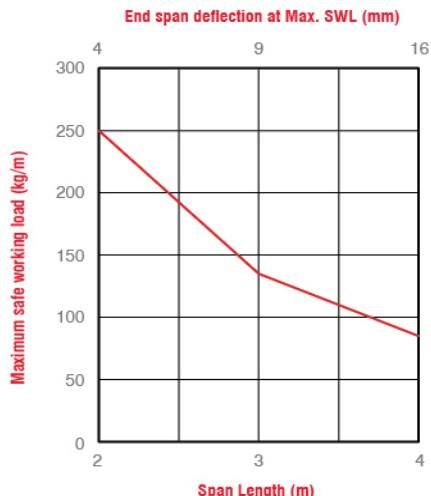

Graph showing safe working load vs span with deflections shown at SWL



SHEARED STEEL DOES HAVE RELATIVELY SHARP EDGES AND
PROTECTIVE GLOVES MUST BE WORN DURING HANDLING

Tamlex | Harcourt | Halesfield 15 | Telford | Shropshire | TF7 4ER

T: 01952 586689 E: sales@tamlex.co.uk W: www.tamlex.co.uk