

amlex Data Sheet

Product Code: Product Range:

MRE63 Cable Trunking, Standard Trunking

150mm x 75mm Galvanised Steel Trunking (3m Length)

duct Range: Issue Date:
Trunking, Standard 11/7/2025

Description:

• Single Compartment.

Features:

- Manufactured from continuously hot dipped zinc coated low Carbon Steel Strip to BSEN10346: 2015.
- All lid fixings and couplers are included as standard.
- · Lid is secured using 'Bridge Pieces'.
- Four lid fixings per 3m length. Bridge pieces also act as cable retainers.
- Multi Compartment trunking and accessories available.
- Special sizes and bespoke designs are available upon request.
- · Tamperproof lid fixing option available on request.
- Can be powder coated to customer specific RAL colour.
- Manufactured to allow retrofit installation of our IP4X system. (Sold Separately).



Image for illustrative purposes only

Technical: Imp

Product Type Trunking Width 150mm Height 75mm Length 3000mm Weight 10.02 Kgs Number of Compartments Material Pre-Galvanised Steel (Zinc Coated) Colour/Finish Self Colour Standards BS EN 50085-2-1 2006; BS EN 10346:2015 Supplied With Lid fixings and couplers included.

Important:

Cable trunking is designed such that the main body carries the weight of cables. Trunking should NOT be installed in any way that causes the lid to carry the cable weight.

Trunking Weights:

1. Compartment	2. Compartment	3. Compartment
10.02 Kgs	14.556 Kg	16.842 Kg

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.

Dimensions: (mm)


H 77mm

W 152mm

L 3000mm

P1 35mm

P2 1350mm

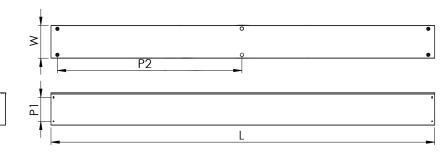

Tamlex | Harcourt | Halesfield 15 | Telford | Shropshire | TF7 4ER

T: 01952 586689 E: sales@tamlex.co.uk W: www.tamlex.co.uk