

**Product Code:**

FS225/25/3

Product Range:

Flush Screed Trunking

Issue Date:

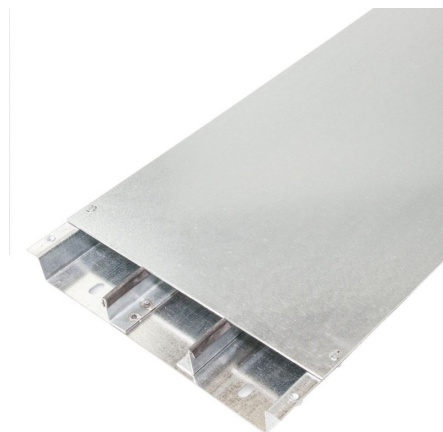
30/5/2025

Description:

3 Compartment 225x25mm Flush Screed Trunking (2M Length)

Features:

- 3 segregated compartments.
- Shallow 25mm deep trunking profile.
- Reinforced lid to allow foot traffic.
- Manufactured from continuously hot dipped zinc coated low Carbon Steel Strip to BSEN 10346:2009.
- Fillets have rubber gasket strip fitted to increase stability and reduce lid deflection.
- Intersections are 55mm deep to allow the maximum cable capacity throughout the system.
- **Screed trunking must be installed on a solid foundation and completely supported by a screed ribbon.**

**Technical:****Product Type** Floor Trunking**Width** 225mm**Height** 25mm**Length** 2000mm**Number of Compartments****Material** Pre-Galvanised Steel (Zinc Coated)**Colour/Finish** Self Colour**Standards** BS EN 10346:2009**Supplied With** If required M6 x 40mm jacking bolts need to be ordered separately. (Cat No. TF005).**Pack Quantity** 2 m length complete with 2x 1m lids and couplers.

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.