


Tamlex Data Sheet



Product Code:	Product Range:	Issue Date:
FS225/25/3	Flush Screed Trunking	8/1/2026
Description:	3 Compartment 225x25mm Flush Screed Trunking (2M Length)	
Features:	<ul style="list-style-type: none">• 3 Segregated Compartments.• Shallow 25mm deep trunking profile.• Reinforced lid to allow foot traffic.• Manufactured from zinc galvanised steel strip to BS EN 10346:2015.• Fillets have rubber gasket strip fitted to increase stability and reduce lid deflection.• Intersections are 55mm deep to allow the maximum cable capacity throughout the system.• Screed trunking must be installed on a solid foundation and completely supported by a screed ribbon.	

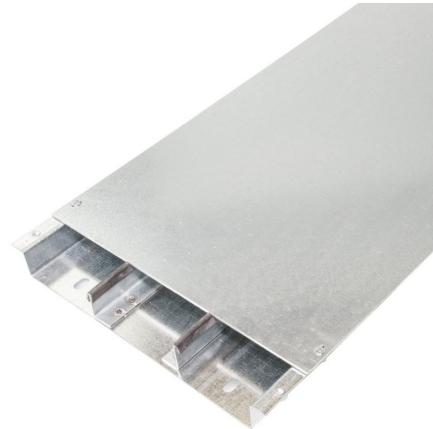

Technical:

Product Type Flush Screed Floor Trunking

Width 225mm

Length 2000mm

Weight 12.60 Kgs

Dimensions 70mm x 82mm x 70mm

Number of Compartments

Material Pre-Galvanised Steel (Zinc Coated)

Colour/Finish Self Colour

Standards BS EN 10346:2015

Supplied With If required, M6 x 40mm jacking bolts can be ordered separately under Catalogue Number (TF005).

Pack Quantity 2m length complete with 2x 1m lids and couplers.

Important:

Screed trunking must be installed on a solid foundation and completely supported across its complete width by a screed ribbon.

Extra Information

The galvanised trunking lids and service boxes should be in position before the screed is poured to ensure the pressure of the screed does not distort the side walls of the trunking.

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.