

**Product Code:**

FSBM3

**Product Range:**

Modular Screed Trunking

**Issue Date:**

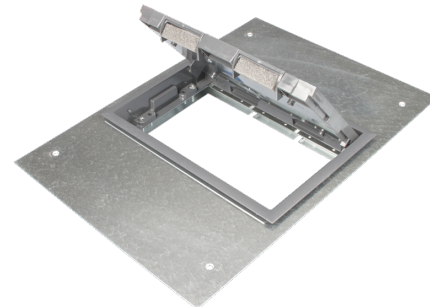
4/6/2026

**Description:**

3 Compartment 65mm Service Box for 350x65mm Modular Flush Screed Trunking

**Features:**

- 3 Compartment Flush Screed Service Box.
- Service boxes can be fitted after trunking is installed, simply by removing trunking lid.
- Service boxes can be positioned/repositioned anywhere along trunking.
- Reversible self-closing lid.
- Reinforced with steel plates with a recessed lid to allow 10mm infill.
- Durable polycarbonate trim and lid as standard.
- Cable outlets with sponge foam to prevent ingress.
- Service boxes are designed for use in office type environments and should not be installed in main walkways, corridors, gangways or in contact with wheeled traffic.
- The minimum screed depth is 68mm. Service boxes should be installed when the trunking is fitted.
- **Screed trunking must be installed on a solid foundation and completely supported by a screed ribbon..**
- Suitable for Tamlex modular flush screed trunking only.

**Technical:**

**Product Type** Flush Screed Floor Trunking

**Width** 350mm

**Weight** 3.70 Kgs

**Number of Compartments**

**Material** Pre-Galvanised Steel (Zinc Coated)

**Colour/Finish** Self Colour

**Standards** BS EN 10346:2015

**Important:**

Screed trunking must be installed on a solid foundation and completely supported across its complete width by a screed ribbon.

**Extra Information**

The galvanised trunking lids and service boxes should be in position before the screed is poured to ensure the pressure of the screed does not distort the side walls of the trunking.

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.

Tamlex | Harcourt | Halesfield 15 | Telford | Shropshire | TF7 4ER

**T:** 01952 586689 **E:** sales@tamlex.co.uk **W:** www.tamlex.co.uk