

**Product Code:**

HDL/BC/G

Product Range:Heavy Duty Accessories, Hot
Dipped Galvanised, Ladder**Issue Date:**

2/9/2025

Description:

Heavy Duty Ladder Bendable Connector (Pairs) HDG

Features:

- Bendable connectors can be used for:
 - A) fabricating fittings onsite from cut lengths of ladder.
 - B) reducing width of a run to the next size down when a properly manufactured reducer is not available.
 - C) correcting minor mis-alignment problems.
 - D) coupling lengths of ladder to form articulated bends.
- Bendable couplers can be joined together for multiple configurations.
- Supplied in pairs with the appropriate quantity of fasteners. (4 per coupler)
- Manufactured from the same HDG steel as straight lengths for consistent strength and corrosion protection.


**Technical:****Product Type** Connector**Height** 115mm**Length** 250mm**Weight** 0.70 Kgs**Gauge** 1.5mm**Material** Post Hot-Dipped Galvanised (HDG)**Colour/Finish** Self Colour**Standards** BS EN ISO 1461:2009**Supplied With** 8x M10 Fastener Sets Per Coupler**Pack Quantity** Pairs**Important:**

HDG ladders are suitable for internal and external use, including light industrial and coastal environments. Ensure cut edges or drilled holes are treated with a suitable zinc-rich paint or similar to maintain corrosion protection.

Extra Information

adjust each coupler position to align the slots with the side rail slots and secure with all fasteners. Recommended Torque (M10): 40Nm., Slide the couplers under the return flanges of one ladder side rail and loosely fit a single fastener to each coupler to hold it in place. Slide the second ladder over both couplers

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.

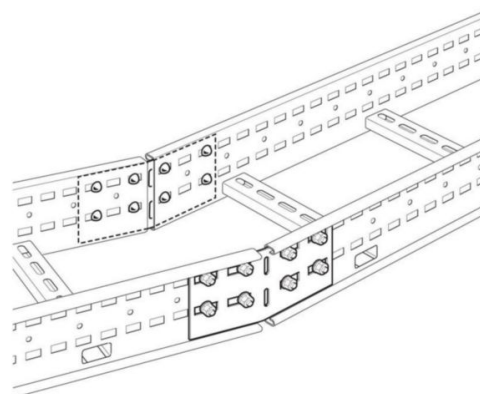

Tamlex | Harcourt | Halesfield 15 | Telford | Shropshire | TF7 4ER

T: 01952 586689 **E:** sales@tamlex.co.uk **W:** www.tamlex.co.uk