



Product Code:

BT/FE200

Product Range:

FastConnect Basket Tray

Issue:

A


Tamlex Data Sheet

Description:

FastConnect 200 mm 90° Flat Elbow for Basket Tray

Features:

Provides a neat 90° elbow bend
Comes pre-installed with FastConnect coupler

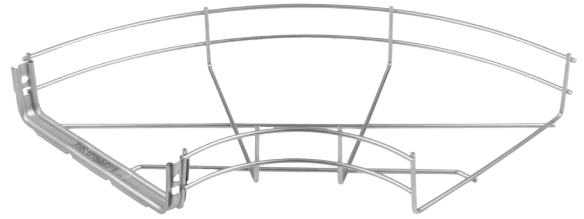

Technical:

Angle	90°
Height	60 mm
Width	200 mm
Material	Pre-Galvanised Steel
Type	FastConnect Basket Tray
Standard	UNE-EN 2081 :2010; UNE-EN 16120-2:2012
Supplied With	FastConnect Coupler
Corrosion Rating	Class 6. (IEC 61537)



Basket Tray:

Min. Working Temperature	-40°C
Max. Working Temperature	+150°C
According to Standard	BS EN 61537

Allowable Working Load AWL (N/m)

The allowable working load (AWL) is the maximum load which can be applied during normal use, without danger. Therefore, the workload shall always be less than the AWL. The AWL of our products are calculated in accordance with BE EN 61537.

Grid Configuration: mm

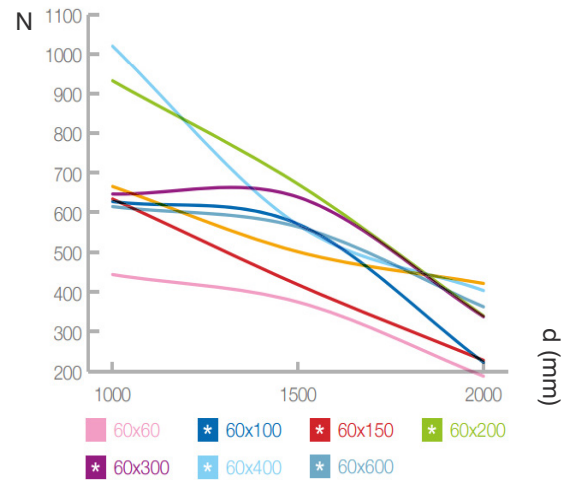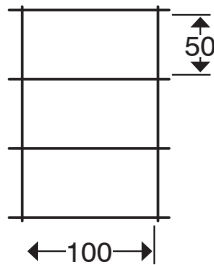

AWL = (Newtons/m) ; d = distance between supports (mm)
1 Newton = 0.102 kg.

Dimensions: mm

H	60
W	200

