



Product Code:

BTF150/60

Product Range:

FastConnect Basket Tray

Issue:

A


Tamlex Data Sheet

Description:

FastConnect 150 mm x 60 mm Basket Tray (3m Length)

Features:

- Supplied with pre-installed FastConnect coupler as standard
- 60 mm depth as standard
- Steel wire frame 4.0 mm diameter
- The FastConnect coupler can be easily removed and repositioned if necessary
- Supplied in 3 meter lengths
- Can be powder coated to any colour

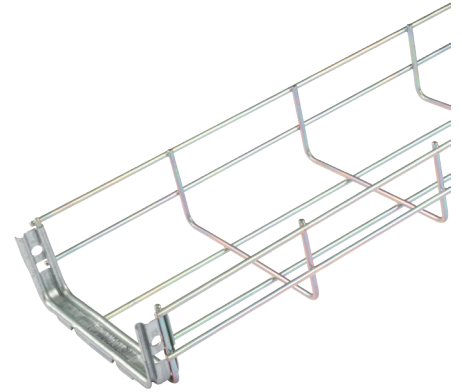

Technical:


Height	60 mm
Width	150 mm
Length	3 m
Material	Zinc Plated Galvanised Steel
Finish	Electro Zinc
Type	FastConnect Basket Tray
Standard	BS EN 61537:2007; UNE-EN 2081 :2010; UNE-EN 16120-2:2012
Supplied With	FastConnect Coupler
Corrosion Rating	Class 6. (IEC 61537)

Basket Tray:

Min. Working Temperature	-40°C
Max. Working Temperature	+150°C
According to Standard	BS EN 61537


Allowable Working Load AWL (N/m)

The allowable working load (AWL) is the maximum load which can be applied during normal use, without danger. Therefore, the workload shall always be less than the AWL. The AWL of our products are calculated in accordance with BE EN 61537.

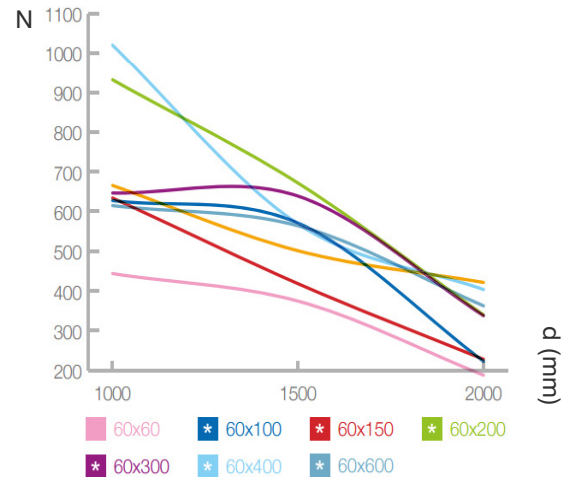

AWL = (Newtons/m) ; d = distance between supports (mm)
1 Newton = 0.102 kg.

Grid Configuration: mm



Dimensions: mm

H	60
W	150
L	3m

