



**Product Code:**

BTF400/60

**Product Range:**

FastConnect Basket Tray

**Issue:**

A

# Tamlex Data Sheet

**Description:**

300 x 60 mm Tamlex FastConnect Basket Tray - 3m

**Features:**

- Supplied with pre-installed FastConnect coupler as standard
- 60 mm depth as standard
- Steel wire frame 4.0 mm diameter
- The FastConnect coupler can be easily removed and repositioned if necessary
- Supplied in 3 meter lengths
- Can be powder coated to any colour



**Technical:**


<b>Height</b>	60 mm
<b>Width</b>	400 mm
<b>Length</b>	3 m
<b>Material</b>	Zinc Plated Galvanised Steel
<b>Finish</b>	Electro Zinc
<b>Type</b>	FastConnect Basket Tray
<b>Standard</b>	BS EN 61537:2007; UNE-EN 2081 :2010; UNE-EN 16120-2:2012
<b>Supplied With</b>	FastConnect Coupler
<b>Corrosion Rating</b>	Class 6. (IEC 61537)

**Basket Tray:**

<b>Min. Working Temperature</b>	-40°C
<b>Max. Working Temperature</b>	+150°C
<b>According to Standard</b>	BS EN 61537


**Allowable Working Load AWL (N/m)**

The allowable working load (AWL) is the maximum load which can be applied during normal use, without danger. Therefore, the workload shall always be less than the AWL. The AWL of our products are calculated in accordance with BE EN 61537.

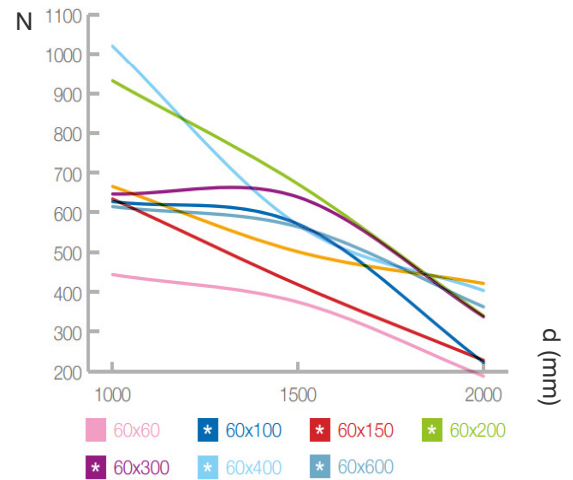

AWL = (Newtons/m) ; d = distance between supports (mm)  
1 Newton = 0.102 kg.

**Grid Configuration: mm**



**Dimensions: mm**

<b>H</b>	60
<b>W</b>	400
<b>L</b>	3m

