

Product Code: Issue Number: Issue Date: Issued By:

24/11/2022 TGHT86 2.0

ADH



Description:

200X150 IP4X 45° GUSSET BEND TOP LID

Features:

Our IP4X turnbuckle trunking offers a range of gusset bends and tees which allow a greater bend radius for

Designed with built-in couplers on all outlets and an integrated lip which fit inside the trunking body, while the lid is designed to fit over the main trunking lid. Manufactured from continuously hot dipped zinc coated low carbon steel strip to BSEN10346: 2009.



Technical:

		(
Height	150 mm	r
Width	200 mm	—Т v
Length	199 mm	V
Material	1.0 mm steel	_
Finish	Pre-Galvanised Steel	
Trunking Type	Turnbuckle Gusset Bend	
Standard	BS EN 50085-1; BS EN 10346	_
IP Rating	IP4X	_

Important:

Cable trunking is designed such that the main body carries the weight of cables. Trunking should NOT be installed in any way that causes the lid to carry the cable weight.

Multi-Compartment Options

Standard trunking and accessories are available in multi compartment options. Trunking and accessories are supplied with equal compartments as standard. For unequal compartments, details must be supplied at the time of order. 3 compartment is available in width code 3 and above.


Weights:

1 Compartment	2 Compartment	3 Compartment
0.985 Kg	1.172 Kg	1.359 Kg

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.

Dimensions:	mm
Н	152 mm
W	199 mm
D	198 mm
P1	118 mm
P2	31 mm

Dimensions are identical for single and multi-compartment

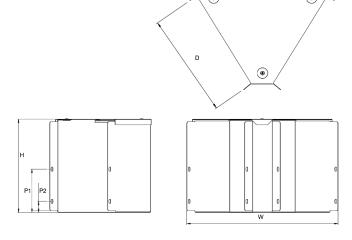

Tamlex | Harcourt | Halesfield 15 | Telford | Shropshire | TF7 4ER T: 01952 586689 E: sales@tamlex.co.uk W: www.tamlex.co.uk