

Product Code:	Issue Number:	Issue Date:	Issued By:	(P
TNEN82	2.0	09/01/2023	ADH	CER

# **Description:**

# 200X50 IP4X 90° SHARP BEND INSIDE LID

### Features:

Our IP4X turnbuckle trunking offers a range of gusset bends and tees which allow a greater bend radius for cables.

Designed with built-in couplers on all outlets and an integrated lip which fit inside the trunking body, while the lid is designed to fit over the main trunking lid. Manufactured from continuously hot dipped zinc coated low carbon steel strip to BSEN10346: 2009.



Cable trunking is designed such that the

Trunking should NOT be installed in any

#### Important: Technical: 50 mm Height main body carries the weight of cables. 200 mm Width way that causes the lid to carry the cable 90 mm Length weight. 1.0 mm steel Material Finish Pre-Galvanised Steel Turnbuckle Sharp Bend **Trunking Type** BS EN 50085-1; BS EN 10346 Standard

# **Multi-Compartment Options**

Standard trunking and accessories are available in multi compartment options. Trunking and accessories are supplied with equal compartments as standard. For unequal compartments, details must be supplied at the time of order. 3 compartment is available in width code 3 and above.

IP4X

### Weights:


**IP Rating** 

1 Compartment	2 Compartment	3 Compartment
0.610 Kg	0.664 Kg	0.718 Kg

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.

Dimensions:	mm
Н	52 mm
W	198 mm
D	102 mm
L	128 mm
I	56 mm
P1	N/A Single hole

Dimensions are identical for single and multi-compartment

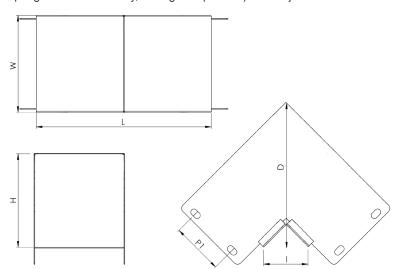

Tamlex | Harcourt | Halesfield 15 | Telford | Shropshire | TF7 4ER T: 01952 586689 E: sales@tamlex.co.uk W: www.tamlex.co.uk