

Product Code: Issued By: **Issue Number:** Issue Date: TNEN88 2.0 09/01/2023 **ADH**

Description:

200X200 IP4X 90° SHARP BEND INSIDE LID

Features:

Our IP4X turnbuckle trunking offers a range of gusset bends and tees which allow a greater bend radius for

Designed with built-in couplers on all outlets and an integrated lip which fit inside the trunking body, while the lid is designed to fit over the main trunking lid. Manufactured from continuously hot dipped zinc coated low carbon steel strip to BSEN10346: 2009.



Cable trunking is designed such that the

Important:

Technical:

		Cable trunking is designed such that the
Height	200 mm	main body carries the weight of cables.
Width	200 mm	Trunking should NOT be installed in any way that causes the lid to carry the cable
Length	240 mm	weight.
Material	1.0 mm steel	
Finish	Pre-Galvanised Steel	
Trunking Type	Turnbuckle Sharp Bend	
Standard	BS EN 50085-1; BS EN 10346	
IP Rating	IP4X	

Multi-Compartment Options

Standard trunking and accessories are available in multi compartment options. Trunking and accessories are supplied with equal compartments as standard. For unequal compartments, details must be supplied at the time of order. 3 compartment is available in width code 3 and above.


Weights:

1 Compartment	2 Compartment	3 Compartment
2.143 Kg	2.605 Kg	3.067 Kg

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.

Dimensions:	mm
Н	202 mm
W	198 mm
D	312 mm
L	338 mm
I	56 mm
P1	87 mm

Dimensions are identical for single and multi-compartment

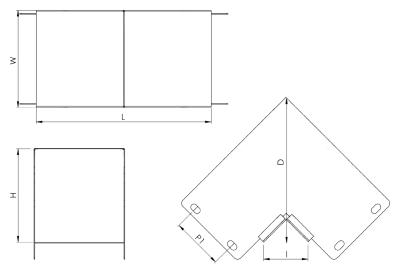

Tamlex | Harcourt | Halesfield 15 | Telford | Shropshire | TF7 4ER T: 01952 586689 E: sales@tamlex.co.uk W: www.tamlex.co.uk