

Description:

100X100 IP4X 90° SHARP BEND OUTSIDE LID

Features:

Our IP4X turnbuckle trunking offers a range of gusset bends and tees which allow a greater bend radius for cables.

Designed with built-in couplers on all outlets and an integrated lip which fit inside the trunking body, while the lid is designed to fit over the main trunking lid. Manufactured from continuously hot dipped zinc coated low carbon steel strip to BSEN10346: 2009.



Important:

Cable trunking is designed such that the ain body carries the weight of cables. runking should NOT be installed in any ay that causes the lid to carry the cable eight.

Technical:

| | | Ca |
|---------------|----------------------------|----------|
| Height | 100 mm | ma |
| Width | 100 mm | Tru |
| | 140 mm | wa we |
| Length | 140 mm | we |
| Material | 1.0 mm steel | |
| Finish | Pre-Galvanised Steel | |
| Trunking Type | Turnbuckle Sharp Bend | |
| Standard | BS EN 50085-1; BS EN 10346 | |
| IP Rating | IP4X | |

Multi-Compartment Options

Standard trunking and accessories are available in multi compartment options. Trunking and accessories are supplied with equal compartments as standard. For unequal compartments, details must be supplied at the time of order. 3 compartment is available in width code 3 and above.


Weights:

| 1 Compartment | 2 Compartment | 3 Compartment |
|---------------|---------------|---------------|
| 0.742 Kg | 0.890 Kg | 1.038 Kg |

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.

| Dimens | ions: mm | |
|--------|----------|----------|
| н | 102 mm | |
| W | 98 mm | 3 |
| D | 172 mm | |
| L | 198 mm | <u> </u> |
| I | 56 mm | - |
| P1 | 50 mm | |

single and multi-compartment

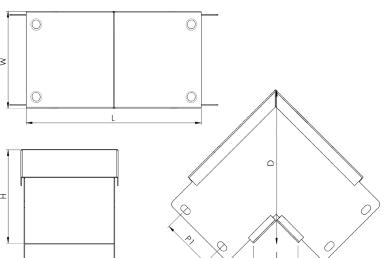

Tamlex | Harcourt | Halesfield 15 | Telford | Shropshire | TF7 4ER T: 01952 586689 E: sales@tamlex.co.uk W: www.tamlex.co.uk