

Product Code: MRE22

Product Range: Cable Trunking, Standard **Issue Date:** 30/10/2025

Important:

Trunking

Description:

50mm x 50mm Galvanised Steel Trunking (3m Length)

Features:

- · Single Compartment.
- Manufactured from continuously hot dipped zinc coated low Carbon Steel Strip to BSEN10346: 2015.
- All lid fixings and couplers are included as standard.
- · Lid is secured using 'Bridge Pieces'.
- Four lid fixings per 3m length. Bridge pieces also act as cable retainers.
- Multi Compartment trunking and accessories available.
- Special sizes and bespoke designs are available upon
- Tamperproof lid fixing option available on request.
- · Can be powder coated to customer specific RAL colour.
- Manufactured to allow retrofit installation of our IP4X system. (Sold Separately).



Cable trunking is designed such that the main

body carries the weight of cables. Trunking

should NOT be installed in any way that causes the lid to carry the cable weight.

Technical:

Product Type Trunking Width 50mm

Height 50mm

Length 3000mm

Weight 4.47 Kgs

Number of Compartments

Material Pre-Galvanised Steel (Zinc Coated)

Colour/Finish Self Colour

Standards BS EN 50085-2-1 2006; BS EN 10346:2015

Supplied With Lid fixings and couplers included.

Trunking Weights:

1. Compartment

2. Compartment

3. Compartment

4.47 Kgs

6.665 Kg

N/A

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.

Dimensions: (mm)


H 52mm

W 52mm

L 3000mm

P1 N/A

P2 1350mm

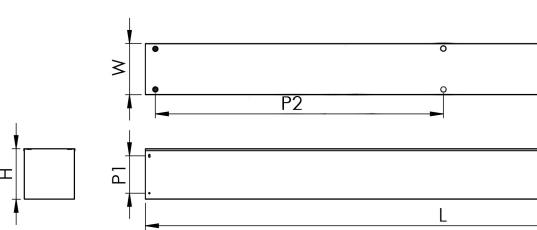

Tamlex | Harcourt | Halesfield 15 | Telford | Shropshire | TF7 4ER

T: 01952 586689 E: sales@tamlex.co.uk W: www.tamlex.co.uk