

Product Code: Product Range:

Trunking

Cable Trunking, Standard

3/7/2025

Issue Date:

Description:

MRE33

75mm x 75mm Galvanised Steel Trunking (3m Length)

Features:

- · Single Compartment.
- Manufactured from continuously hot dipped zinc coated low Carbon Steel Strip to BSEN10346: 2015.
- All lid fixings and couplers are included as standard.
- · Lid is secured using 'Bridge Pieces'.
- Four lid fixings per 3m length. Bridge pieces also act as cable retainers.
- Multi Compartment trunking and accessories available.
- · Special sizes and bespoke designs are available upon request.
- Tamperproof lid fixing option available on request.
- Can be powder coated to customer specific RAL colour.

t installation of our IP4X M sy **BUY NOW**



Technical:

Product Type Trunking Width 75mm Height 75mm Length 3000mm Weight 6.93 Kgs **Number of Compartments** Material Pre-Galvanised Steel (Zinc Coated) Colour/Finish Self Colour Standards BS EN 50085-2-1 2006; BS EN 10346:2015 Supplied With Lid fixings and couplers included.

Important:

Cable trunking is designed such that the main body carries the weight of cables. Trunking should NOT be installed in any way that causes the lid to carry the cable weight.


Trunking Weights:


1. Compartment 2. Compartment 3. Compartment 6.93 Kgs 9.999 Kg 12.285 Kg

The approximate weights given are for pre-galvanised finish only, in kilograms (nominal) and subject to material thickness tolerance.

(mm) **H** 77mm **W** 77mm L 3000mm **P1** 35mm **P2** 1350mm

Dimensions:



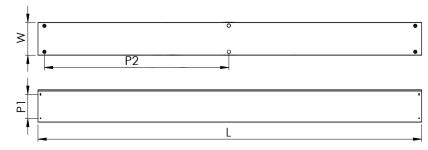

Tamlex | Harcourt | Halesfield 15 | Telford | Shropshire | TF7 4ER

T: 01952 586689 E: sales@tamlex.co.uk W: www.tamlex.co.uk